


we simplify your work

Lasercomb - technology for the production of dieboard and packaging solutions as well as the sign industry.



**CAD / CAM Software
Impact**

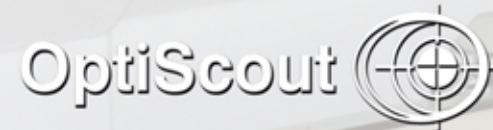


**Digital finishing
Software**

| | | | |
|------------------|--|--------|--------|
| | act | nom | |
| X | -1,887 | -1,887 | |
| Y | 17,863 | 17,863 | |
| Z | 45,000 | 45,000 | |
| Program[1] | 0 | | |
| Last | 02.11.13 | | |
| Actual: | 00:00:00 | | |
| Cut width: | | | |
| Reference: | Point 1 | | |
| Program: | LMB.DIN | | |
| Z axis function: | Materialthickness a. Z-top, comp. active | | |
| Material: | 12 mm | Wood | Vacuum |



LASERCOMB
we simplify your work


PTSNEO

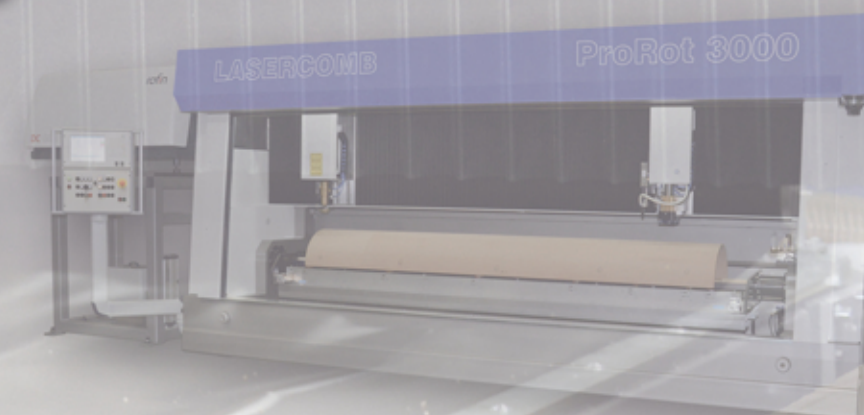

**Lasercutting systems for flatbed
and rotary dieboard**

Lasercomb GmbH
Siemensstr. 2
D-73274 Notzingen

Tel. +49(0)7021-7240-0
Fax. +49(0)7021-7240-599
E-Mail: info@lasercomb.com
<http://www.lasercomb.com>

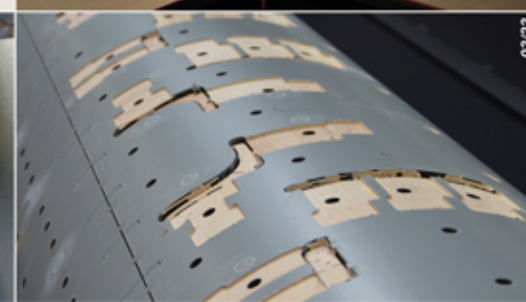

Water cooler for cooling of the
lasersource and cutting optics



LaserScan for
wide area engraving




3 Exhaust ventilators
to extract the
cutting smoke



Routing unit to mill position
holes/pockets in both flatbed
and/or rotary dies



Screwing unit for automatic
screw placement to fix the
rotary shell to the
support discs

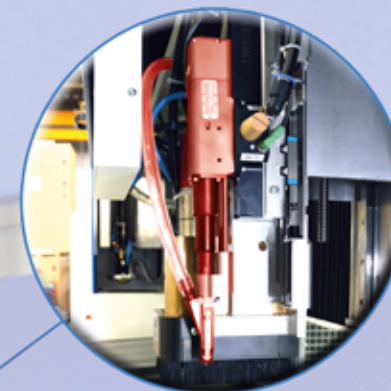

Flexible roller shutter for
improved smoke extraction

Pneumatic board
clamping system

Flatbed cutting area max.
plywood size 1500 x 3000 mm
(59" x 118")

Loading support for easy
loading of flatbed dies

Rofin Sinar Slab 3
Lasersource
available with
1500 / 2000 / 2500 /
3000 Watt

Touch screen panel
with graphic display



DiePacker
software

Security
light barrier

Rotary unit for the cutting of rotary shells
shell length 1000 - 3000 mm
cutting area 0 - 3000 mm
diameter 174 - 696 mm (option 808 mm)

Standard cutting nozzle
with crash protection system

Automatic
tool changer

Screw hopper to
feed screwing unit

